




(注) ①. ③-1 86.3と101.3の直角度0.05/86.3

①. ③-2 面と辺の直角度0.05/15

①. ③-3 表裏の平行度0.01

①. ③-4 普通許容差±0.1

①. ③-5 材質はS45C

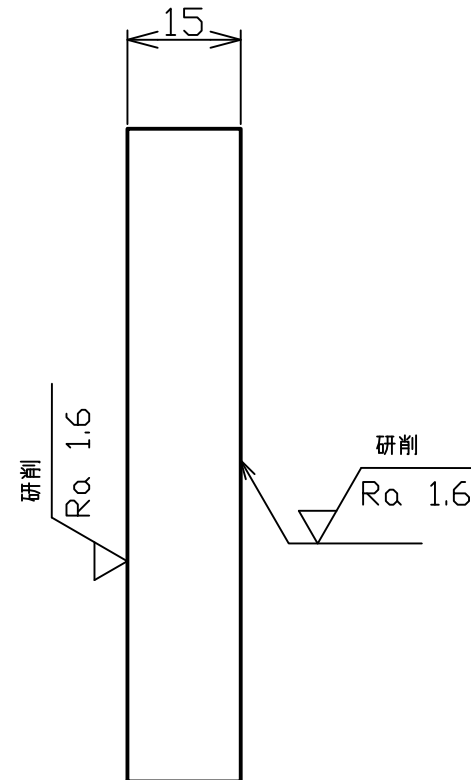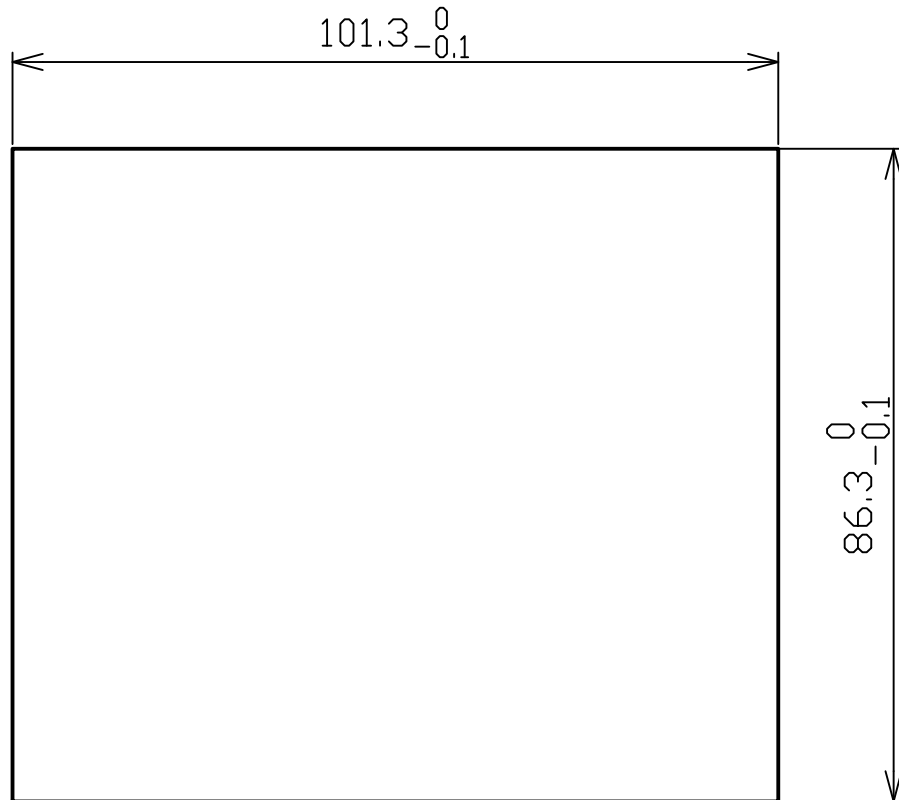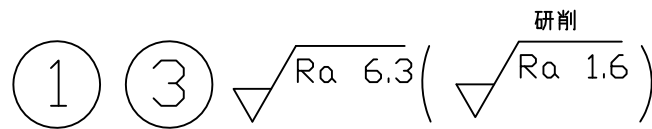




(注) ②-1 86.3と101.3の直角度0.05/86.3

②-2 面と辺の直角度0.05/12

②-3 表裏の平行度0.01

②-4 普通許容差±0.1




②-5 材質はS45C

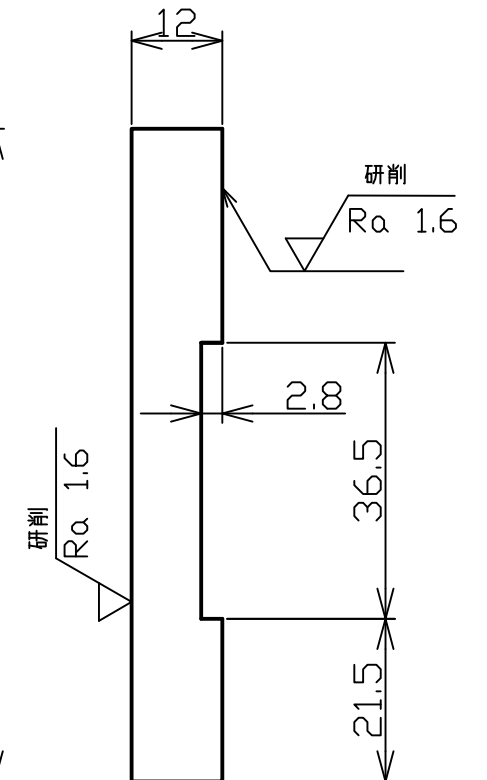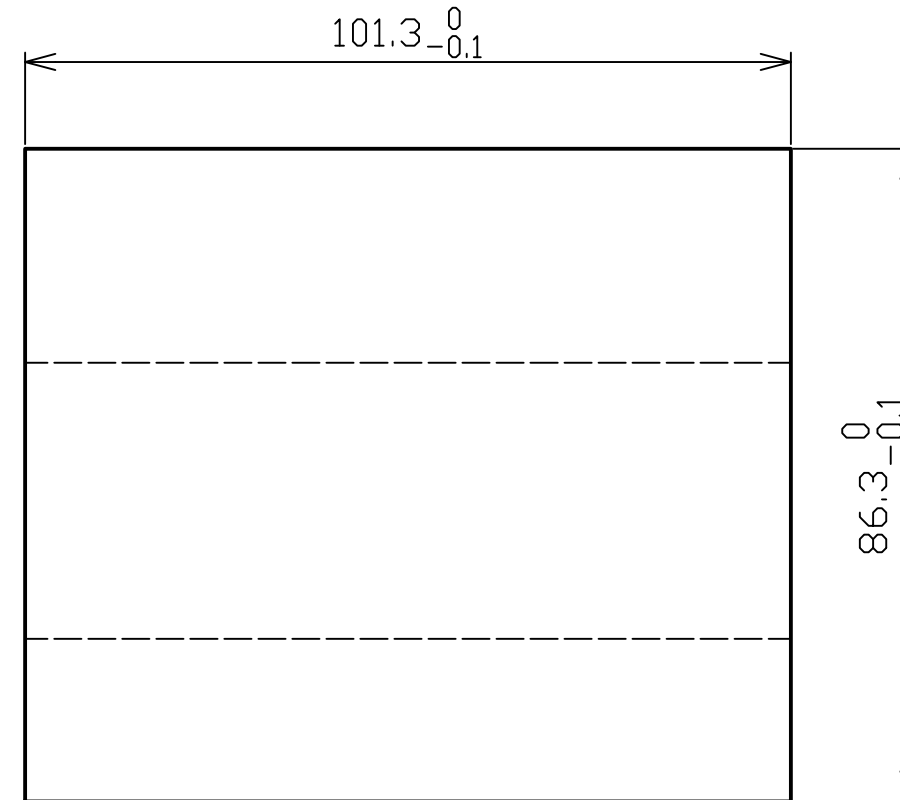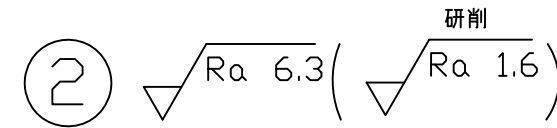

(注) ④-1 普通許容差±0.1

④-2 材質はS45C



④-3 熱間圧延棒鋼（黒皮）

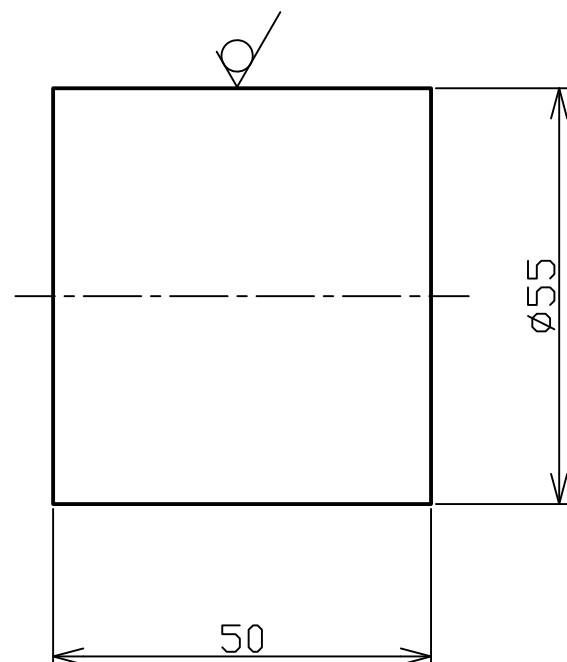

(注) ⑤-1 普通許容差±0.1

⑤-2 材質はS45C


⑤-3 熱間圧延棒鋼（黒皮）

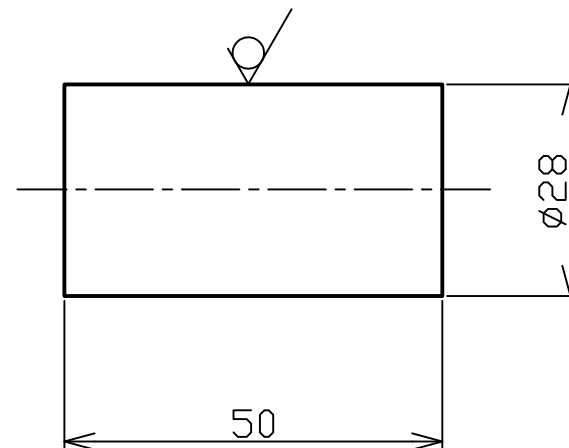

(注) ⑥-1 普通許容差±0.1

⑥-2 材質はS45C

⑥-3 熱間圧延棒鋼（黒皮）

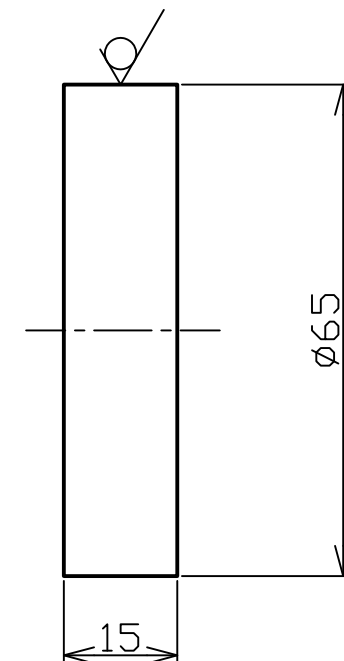

「抜き型職種」  
素材図